



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : D04H 11/04	A1	(11) International Publication Number: WO 99/61693 (43) International Publication Date: 2 December 1999 (02.12.99)
--	-----------	--

(21) International Application Number: PCT/CZ98/00025

(22) International Filing Date: 25 May 1998 (25.05.98)

(71) Applicant (for all designated States except US): I.N.T.,
KRČMA RADKO [CZ/CZ]; Karla Čapka 22, 460 05
Liberec 5 (CZ).

(72) Inventors; and

(75) Inventors/Applicants (for US only): JIRSÁK, Oldřich
[CZ/CZ]; Dobiášova 856/6, 460 06 Liberec 6 (CZ).
HANUŠ, Jaroslav [CZ/CZ]; Vanurova 819, 460 03 Liberec
3 (CZ). KOTÉK, Václav [CZ/CZ]; Karla Čapka 9, 460 05
Liberec 5 (CZ). SANETRŇÍK, Filip [CZ/CZ]; Malátova
430, 460 13 Liberec 13 (CZ). KRČMA, Radko [CZ/CZ];
Karla Čapka 22, 460 05 Liberec 5 (CZ).(74) Agent: KUBÍČKOVÁ, Kvetoslava; Rektorát CVUT, Patentové
Středisko BIC CVUT, Žitkova 4, 166 36 Praha 6 (CZ).(81) Designated States: AU, BR, CA, ID, IL, JP, KR, TR, US, ZW,
European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR,
GB, GR, IE, IT, LU, MC, NL, PT, SE).


Published

With international search report.

(54) Title: A DEVICE FOR PERPENDICULAR STRATIFICATION OF PLANARY FIBROUS SHAPES

(57) Abstract

A device for perpendicular stratification of planary fibrous shapes, above all of fibrous web, comprising two synchronously moving elements, connected with the driving mechanism according to the invention consists in that the reciprocating moving elements (1, 2) are connected with their driving mechanism (3) indirectly by the intermediary of at least one robust shaft (4) rigidly fitted in bearings in a rigid framework of the machine, while one element (1) is connected with the shaft (4) rigidly or over flexible joints (6), and a second element (2) is coupled by means of flexible joints (7) with the same shaft or with another shaft. The driving mechanism (3) can consist of one driving shaft (8) with two crank assemblies (9) arranged with a phase shift to each other. The flexible joints (6 and 7) consist of flat steel springs with a width-to-thickness ratio more than 10.

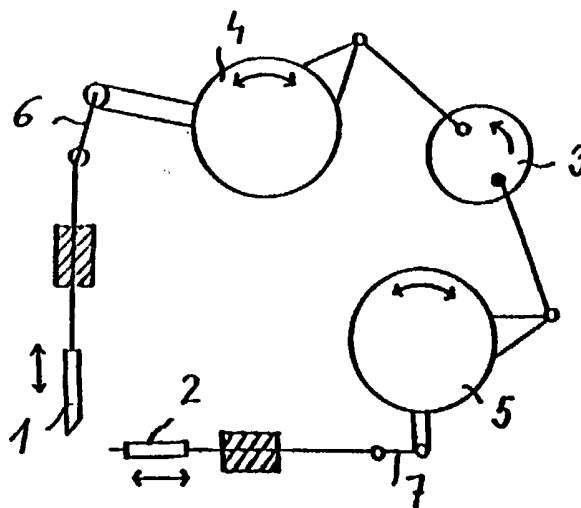

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

A Device for Perpendicular Stratification of Planary Fibrous Shapes

The scope of the patent is a device for production of voluminous shapes by perpendicular stratification of planary fibrous shapes, above all of fibrous web
5 from a carding machine.

Description of the Prior Art

For the production of webbing from a web as obtained from machines with
10 carding effect substantially three basic principles are known and used, based on parallel, cross or perpendicular web stratification. The method of the fibrous layer preparation and the related fibre orientation in the layer has a deciding importance for the product properties. In the case of voluminous products, which are exposed in their application to a single, repeated or longlasting stress, the
15 best properties are obtained by preparing the fibrous layer by perpendicular stratification of the web. Under most variable conditions such products best retain their functional properties, especially as fillers or thermal insulants.

Several types of equipment working on rotational or vibration principle are known in the production of a fibrous layer composed of fibres laid substantially
20 perpendicularly to the product plane.

Perpendicular laying devices on rotational principle form the web by means of various types of rotating elements such as gear wheels, cylinders with pins or rotating disks with specially shaped indents between which the web is fed. A merit of such systems protected e.g. by CZ AO 273997 is their high performance
25 and a wide range of perpendicularly laid produced webbing. A limitation is their limited possibility of controlling the fibre position at various specific densities of the web, and a heterogenous structure of product surface. A deviation of fibre orientation from a perpendicular orientation to the layer surface makes the compressing resistance of the product decline. Rotating elements of the laying
30 device such as e.g. a system of wires, formed disks or indentations produce a row-like structure, connected with an irregular density of fibre distribution in the product area.

Vibration laying devices work on the principle of shaping the fed web by a forming batten with an eventual upholding of shaped plaits by a thrust batten. The machines working on this principle are known in various arrangements, and are mostly adapted to the requirements on the product properties. So e.g. according to the US Patent 2.638960 a device consists of a horizontally vibrating cheek which in compressed condition feeds the web or a yarn system onto a base layer and in the back position the thrust batten presses the material in the form of a loop to the base layer with an adhesive.

According to CZ P 37 619 the web fed horizontally is bent by vertically situated battens from upside and from downside. The web fibres are attached from upside as well as from downside to the base layers. CZ P 56 029 describes a device in vertical arrangement, in which the fed web is plaited between a pair of conveyor belts by a pair of battens rocking in reciprocating movements against each other. By attachment of adhesive-coated base layer fabrics fed from both sides a configuration resembling a double plush is formed. A kind of modification thereof is a device described in CZ P 87 556, in which the web fed from upside is taken over and deposited on an adhesive-coated fabric by a pair of alternately working battens in the form of a doffer comb. According to CZ AO 235494 the web from the carding machine is formed on the base directly on the doffing point at the outlet drum of the carder. In this method the positions of the formed plaits are not fixed, so that the product can hardly be transferred to the equipment for chemical or mechanical stiffening. All described mechanisms require to attach the perpendicularly shaped webbing to the base fabric by an adhesive immediately when forming individual plaits, otherwise the structure shaped here is unstable and does not permit to apply known methods of mechanical or adhesion stiffening.

A certain progress in this trend was brought in a device according to CZ AO 269 300 and the related Patent Application PV 1819-92. The web fed to the device from upside is formed in plaits by a vibrating fly comb and individual plaits are pressed to a fibrous layer built up between a conveyor belt and a grid by a synchronously vibrating batten.

The driving mechanism of the shaping elements which must exert a highly demanding and accurate motion, is solved according to PV 1819-92 by a four-joint assembly, featuring two groups of tie-rods driving the two vibrating elements - the fly comb and the batten. The light functional vibrating elements proper are directly connected to assemblies converting a circular motion to a reciprocating motion. A high stress of the assemblies converting the circular motion to a reciprocating motion generates shock forces and causes a vibration of working elements (fly comb, batten). Both shafts are interconnected by sets of three gear-wheels. Though the mechanism provides for a synchronous drive of both working elements, it permits, however, owing to a complicated setup and a considerable mass of the equipment, even in a carefully balanced condition an oscillation frequency merely up to 600 cycles per minute. Such capacity is far from satisfying the needs of modern carding machines, with which the laying device is incorporated into the production line. Said heavy mass of individual components according to this concept leads in a continuous uninterrupted operation to an accelerated wear of the gear-wheels, pins and bearings and consequently to a shorter life expectancy of the machine. With continuing operation time the noise level is gradually increased and the product becomes less uniform. Another consequence thereof is an uneven shaping of individual web plaits with an increasing frequency.

The vibrating elements must be coupled together with the prime mover by a number of joints, the distance from each other depending on the machine frequency required and on the bending rigidity of working elements. Any frequency increase requires therefore an increase in the number of joints and consequently of gear-wheels or of the mass of vibrating elements. Both said possibilities result in an increased overall mass of moving parts of the machine and make any further increase of the working frequency impossible.

Nature of the invention

30

The limitations mentioned above are remedied by a device for perpendicular stratification of planary fibrous shapes with two synchronously vibrating elements according to the invention. The vibrating elements are connected with the driving

member indirectly by the intermediary of one or two robust shafts, rigidly fitted in bearings in a rigid machine framework. The vibrating elements are connected with the shaft(s) directly or by means of a set of flexible joints in sliding fitting. The flexible joints can consist of flat steel springs with a width-to-thickness ration
5 higher than 10, but also of tie rods, having sliding fitting and flexible knuckle joints. The flexible joints with sliding fitting permit to convert a circular motion of the driving prime mover and of the massive shaft into a linear reciprocating motion of vibrating elements.

The mechanism can comprise a driving shaft with two crank assemblies fitted
10 with a phase shift between each other. The shafts are driven by the driving mechanism synchronously so that they make a reciprocating motion around their longitudinal axes. Owing to its large diameter and high rigidity, the shaft (possibly a tube) transmitting a reciprocating motion, does not vibrate under the influence of the forces transmitted onto it by the driving mechanism. Thus the shaft
15 transmits to the working element a motion which is evenly distributed along its whole width without generating any unwanted vibration. The merit of the device is in that it prevents any vibration of working elements even at the necessary high operating speed owing to the connection of said elements with rigidly seated shafts by means of a set of resilient joints, own mass of which is substantially
20 smaller as compared with known transmission members. Such device is able to work at a frequency of 2000 cycles per minute. This is a frequency, permitting to process fibrous web with a speed corresponding to the speed of modern carding machines.

25 Other advantages of the device according to the invention are a high life expectancy at a minimum maintenance demand, a minimum of rotating parts, on which any fibres or web can be wound-on, an easy setting of back position of vibrating elements when adjusting the machine for processing various types of goods directly on the shaft tie-rods, a possibility of easy changing the amplitude
30 of vibrating elements directly on the driving mechanism.

Setting of the phase shift for the vibration motion of the functional members is necessary for a safe web doffing from the doffer comb working edge. This

enables an accurate plait shaping, which is a must for obtaining a smooth surface and an even product density.

Survey of figures in the drawings

5

Fig. 1 shows schematically a device for perpendicular stratification of planary fibrous shapes with one single shaft.

Fig. 2 shows schematically a device for perpendicular stratification of planary fibrous shapes with two shafts and one vibrating element in sliding fitting and a
10 second vibrating element in rigid fitting.

Fig. 2a shows schematically a driving mechanism.

Fig. 3 shows schematically a device for perependicular stratification of planary fibrous shapes with two shafts and vibrating elements in sliding fitting.

15 Examples of embodiment

Example 1

A device shown in Fig. 1 serves for processing of a fibrous layer, e.g. fibrous web coming from a carding machine. It consists of two vibrating elements 1 and 2 for
20 perpendicular stratification of web. Said elements 1 and 2 are connected over a shaft 4 and connecting rod 10 with knuckle joint 11 and a driving mechanism 3. The shaft 4 makes a rotating and reciprocating motion along its longitudinal axis. The shaft 4 is a robust tube having an outer diameter 701 mm and is rigidly fitted in bearings in a rigid framework of the machine. The vibrating element 1 is rigidly
25 connected with the shaft 4, the element 2 is joined by means of tie-rods 7 with sliding fitting and flexible knuckle joints.

The vibrating element 2 takes over the fibrous web by means of a set of needles from the element 1 and shapes a plait, which is then pressed to the fibrous layer on the conveyor belt.

30 The device is suitable for the production of a fibrous layer in which the fibres are oriented predominantly perpendicular towards the fabric plane.

Example 2

A device shown in Fig. 2 consists of two vibrating elements 1 and 2 as in Fig. 1.

The element 1 is connected with a driving mechanism 3 over a shaft 4 and the element 2 over a shaft 5 by means of tie-rods 7 with sliding fitting and flexible knuckle joints. The driving mechanism 3 shown in Fig. 2a consists of a driving shaft 8 with two crank shafts 9. The crank shafts are set up to allow advanced phase movement of one of vibrating elements.

In comparison with Example 1, due to the advanced phase movement of vibrating element 2, the processed fiber layer is better taken off the vibrating element 1. Therefore the folds are more regular and the fabric of smooth surface is produced..

Example 3

A device in Fig. 3 consists of the same elements as in Example 2, both the vibrating elements 1 and 2 are linked with shafts 4 and 5 by means of tie-rods 6 and 7 with sliding fitting and flexible knuckle joints.

The advantage of the device is the straight-lined movement of both vibrating elements 1 and 2 which does not cause air turbulence and vibrations of the fed in carded web. It leads to improved regularity of final fabric.

Example 4

A device as in Example 3, the flexible knuckle joints 6 and 7 are replaced with steel springs. Due to this the mass of links and dynamic loading of driving mechanism is reduced and the life of device improved.

Utilization of the device

The device for perpendicular stratification of planary fibrous shapes is utilizable namely in the textile industry.

Patent claims**5 What we claim is:**

- 10 1. A device for perpendicular stratification of planary fibrous shapes, above all a fibrous web, with two elements making synchronous and reciprocating motions and connected with a driving mechanism, characterized in that the elements (1,2) exerting a reciprocating motion are connected with the driving mechanism (3) indirectly over at least one robust shaft (4) rigidly fitted in bearings in a rigid framework of the machine, while one element (1) is coupled to the shaft (4) rigidly or over flexible joints (6), and a second element (2) is coupled by means of flexible joints (7) with the same shaft or with
- 15 another shaft (5).
2. A device according to Claim 1, characterized in that the driving mechanism (3) consists of one driving shaft (8) with two crank assemblies (9) arranged with a phase shift to each other.
- 20 3. A device according to Claims 1 and 2 characterized in that the flexible joints (6) and (7) consist of flat steel springs with width-to thickness ratio more than 10.

25

30

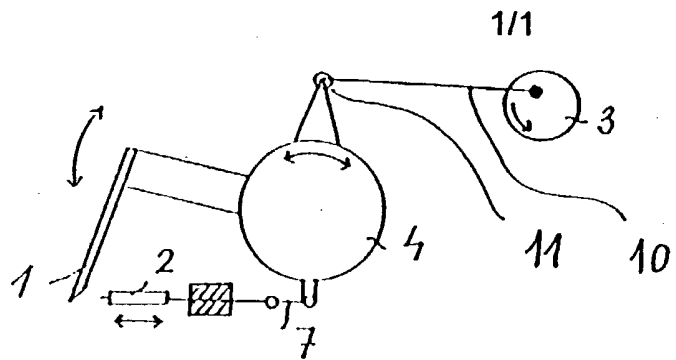


Fig. 1

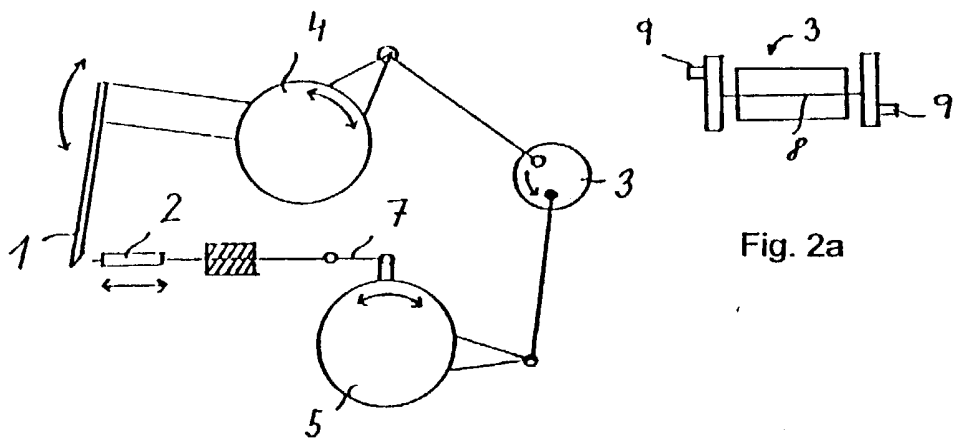


Fig. 2a

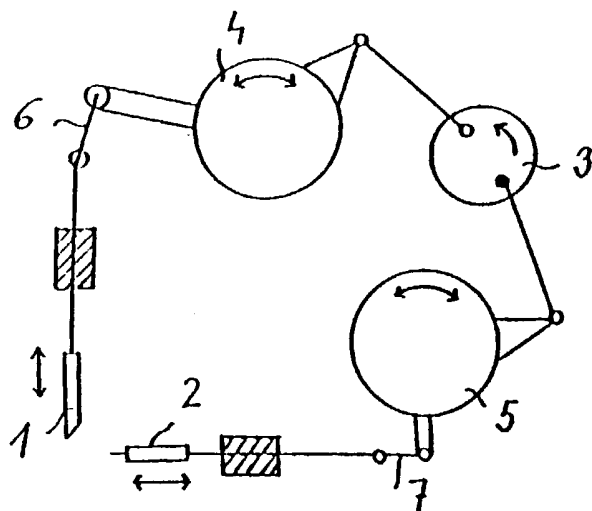


Fig. 3

INTERNATIONAL SEARCH REPORT

In tional Application No

PCT/CZ 98/00025

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 D04H11/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 D04H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2 638 959 A (JOHNSON) 19 May 1953 see column 3, line 61 - column 5, line 4 ---	1
A	GB 2 222 835 A (STODDARD SEKERS INT) 21 March 1990 see claim 1; figure 1 ---	1
A	US 3 010 508 A (WILSON ET AL.) 28 November 1961 see claim 1 -----	1

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"A" document member of the same patent family

Date of the actual completion of the international search

1 April 1999

Date of mailing of the international search report

12/04/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

V Beurden-Hopkins, S

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/CZ 98/00025

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2638959	A	19-05-1953	NONE	
GB 2222835	A	21-03-1990	US 5110397 A	05-05-1992
US 3010508	A	28-11-1961	NONE	

DERWENT-ACC-NO: 2000-053515

DERWENT-WEEK: 200269

COPYRIGHT 1999 DERWENT INFORMATION LTD

TITLE: Device for perpendicular
stratification of planary
fibrous shapes, particularly fibrous
web, for the
production of voluminous shapes

INVENTOR: HANUS, J; JIRSAK, O ; KOTEK, V ; KRCMA, R ;
SANETRNIK, F

PATENT-ASSIGNEE: INT KRCMA RADKO[INTKN]

PRIORITY-DATA: 1998WO-CZ00025 (May 25, 1998)

PATENT-FAMILY:

PUB-NO	PAGES	PUB-DATE	MAIN-IPC
DE 69807262 E		September 19, 2002	N/A
000	D04H	011/04	
WO 9961693 A1		December 2, 1999	E
012	D04H	011/04	
AU 9873303 A		December 13, 1999	N/A
000	D04H	011/04	
EP 1084288 A1		March 21, 2001	E
000	D04H	011/04	
AU 737343 B		August 16, 2001	N/A
000	D04H	011/04	
JP 2002516932 W		June 11, 2002	N/A
013	D04H	001/74	
EP 1084288 B1		August 14, 2002	E
000	D04H	011/04	

DESIGNATED-STATES: AU BR CA ID IL JP KR TR US ZW AT BE CH
CY DE DK ES FI FR GB
GR IE IT LU MC NL PT SE AT BE CH CY DE DK ES FI FR GB GR IE
IT LI LU MC NL PT
SE AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU MC NL PT SE

APPLICATION-DATA:

PUB-NO	APPL-DESCRIPTOR	APPL-NO
--------	-----------------	---------

APPL-DATE		
DE 69807262E	N/A	
1998DE-0607262	May 25, 1998	
DE 69807262E	N/A	
1998EP-0920447	May 25, 1998	
DE 69807262E	N/A	
1998WO-CZ00025	May 25, 1998	
DE 69807262E	Based on	EP 1084288
N/A		
DE 69807262E	Based on	WO 9961693
N/A		
WO 9961693A1	N/A	
1998WO-CZ00025	May 25, 1998	
AU 9873303A	N/A	
1998AU-0073303	May 25, 1998	
AU 9873303A	N/A	
1998WO-CZ00025	May 25, 1998	
AU 9873303A	Based on	WO 9961693
N/A		
EP 1084288A1	N/A	
1998EP-0920447	May 25, 1998	
EP 1084288A1	N/A	
1998WO-CZ00025	May 25, 1998	
EP 1084288A1	Based on	WO 9961693
N/A		
AU 737343B	N/A	
1998AU-0073303	May 25, 1998	
AU 737343B	N/A	
1998WO-CZ00025	May 25, 1998	
AU 737343B	Previous Publ.	AU 9873303
N/A		
AU 737343B	Based on	WO 9961693
N/A		
JP2002516932W	N/A	
1998WO-CZ00025	May 25, 1998	
JP2002516932W	N/A	
2000JP-0551070	May 25, 1998	
JP2002516932W	Based on	WO 9961693
N/A		
EP 1084288B1	N/A	
1998EP-0920447	May 25, 1998	
EP 1084288B1	N/A	
1998WO-CZ00025	May 25, 1998	
EP 1084288B1	Based on	WO 9961693
N/A		

INT-CL (IPC): D01G025/00, D04H001/74 , D04H011/04

ABSTRACTED-PUB-NO: EP 1084288B

BASIC-ABSTRACT:

NOVELTY - The device has vibrating elements (1, 2) that are connected with a driving mechanism (3) indirectly by a robust shaft(s) (4, 5) rigidly fitted in bearings in a rigid machine frameworks.

DETAILED DESCRIPTION - The device has two elements exerting a synchronous and reciprocating motions. The elements (1, 2) are connected with the driving mechanism (3) indirectly over at least one robust shaft (4) rigidly fitted in bearings in a rigid framework of the machine. One element (1) is coupled to the shaft (4) rigidly or over flexible joints (6). The second element (2) is coupled by a flexible joints (7) with the same shaft or with another shaft (5).

USE - The device is for perpendicular stratification of planary fibrous shapes, particularly fibrous web, for production of voluminous shapes.

ADVANTAGE - The shaft transmits to the working element a motion which is evenly distributed along its whole width without generating any unwanted vibration. The device prevents any vibration of working elements even at higher operating speed. It may able to work at a frequency of 2000 cycles per minute. It has higher life expectancy at a minimum maintenance demand, a minimum rotating parts on which any fibers or web can be wound-on, an easy setting of back position of vibrating elements when adjusting the machine for processing various types of goods directly on the shaft tie-rods, a possibility of easy changing the amplitude of vibrating elements directly on the driving mechanism.

DESCRIPTION OF DRAWING(S) - The figure shows a device for perpendicular stratification of planary fibrous shapes with two shafts and vibrating elements in sliding fitting, and with a driving mechanism.

Elements 1, 2

Driving mechanism 3

Robust shaft 4

Another shaft 5

Flexible joints 6, 7

Driving shaft 8

Crank assemblies 9

ABSTRACTED-PUB-NO: WO 9961693A

EQUIVALENT-ABSTRACTS:

NOVELTY - The device has vibrating elements (1, 2) that are connected with a driving mechanism (3) indirectly by a robust shaft(s) (4, 5) rigidly fitted in bearings in a rigid machine frameworks.

DETAILED DESCRIPTION - The device has two elements exerting a synchronous and reciprocating motions. The elements (1, 2) are connected with the driving mechanism (3) indirectly over at least one robust shaft (4) rigidly fitted in bearings in a rigid framework of the machine. One element (1) is coupled to the shaft (4) rigidly or over flexible joints (6). The second element (2) is coupled by a flexible joints (7) with the same shaft or with another shaft (5).

USE - The device is for perpendicular stratification of planary fibrous shapes, particularly fibrous web, for production of voluminous shapes.

ADVANTAGE - The shaft transmits to the working element a motion which is evenly distributed along its whole width without generating any unwanted vibration. The device prevents any vibration of working elements even at higher operating speed. It may able to work at a frequency of 2000 cycles per minute. It has higher life expectancy at a minimum maintenance demand, a minimum rotating parts on which any fibers or web can be wound-on, an easy setting of back position of vibrating elements when adjusting the machine for processing various types of goods directly on the shaft tie-rods, a possibility of easy changing the amplitude of vibrating elements directly on the driving mechanism.

DESCRIPTION OF DRAWING(S) - The figure shows a device for perpendicular stratification of planary fibrous shapes with two shafts and vibrating elements in sliding fitting, and with a driving mechanism.

Elements 1, 2

Driving mechanism 3

Robust shaft 4

Another shaft 5

Flexible joints 6, 7

Driving shaft 8

Crank assemblies 9

CHOSEN-DRAWING: Dwg.2a, 3/3

TITLE-TERMS: DEVICE PERPENDICULAR STRATIFIED FIBRE SHAPE
FIBRE WEB PRODUCE
VOLUME SHAPE

DERWENT-CLASS: F04

CPI-CODES: F02-C02;

SECONDARY-ACC-NO:

CPI Secondary Accession Numbers: C2000-014030

PUB-NO: WO009961693A1

DOCUMENT-IDENTIFIER: WO 9961693 A1

TITLE: A DEVICE FOR PERPENDICULAR
STRATIFICATION OF PLANARY
FIBROUS SHAPES

PUBN-DATE: December 2, 1999

INVENTOR-INFORMATION:

NAME	COUNTRY
JIRSAK, OLDRICH	CZ
HANUS, JAROSLAV	CZ
KOTEK, VACLAV	CZ
SANETRNIK, FILIP	CZ
KRCMA, RADKO	CZ

ASSIGNEE-INFORMATION:

NAME	COUNTRY
I N T KRCMA RADKO	CZ
JIRSAK OLDRICH	CZ
HANUS JAROSLAV	CZ
KOTEK VACLAV	CZ
SANETRNIK FILIP	CZ
KRCMA RADKO	CZ

APPL-NO: CZ09800025

APPL-DATE: May 25, 1998

PRIORITY-DATA: CZ09800025W (May 25, 1998)

INT-CL (IPC): D04H011/04

EUR-CL (EPC): D04H011/04

ABSTRACT:

CHG DATE=20000103 STATUS=O>A device for perpendicular stratification of

planary fibrous shapes, above all of fibrous web, comprising two synchronously moving elements, connected with the driving mechanism according to the invention consists in that the reciprocating moving elements (1, 2) are connected with their driving mechanism (3) indirectly by the intermediary of at least one robust shaft (4) rigidly fitted in bearings in a rigid framework of the machine, while one element (1) is connected with the shaft (4) rigidly or over flexible joints (6), and a second element (2) is coupled by means of flexible joints (7) with the same shaft or with another shaft. The driving mechanism (3) can consist of one driving shaft (8) with two crank assemblies (9) arranged with a phase shift to each other. The flexible joints (6 and 7) consist of flat steel springs with a width-to-thickness ratio more than 10.